

EN 1324



# QIS FFBB

Fire Front for Existing Back Boiler User Manual



## INSTALLATION & OPERATING INSTRUCTIONS

### **Quality Irish Stoves Ltd.**

Rathpatrick, Slieverue, Co. Kilkenny

Telephone: +353 (0) 51 897415 • Fax: +353 (0) 51 897451

Email: [info@qisstoves.ie](mailto:info@qisstoves.ie)

Registered in Ireland NR 500272

VAT No. IE9793511H

*Enjoy Your Stove Safely*

# QIS FIRE FRONT FOR EXISTING BACK BOILER

## Getting Started

Congratulations on your purchase of this quality QIS fire front. With proper preparation, installation and use this product will provide a lifetime of warmth.

## Unpacking the stove

Step 1:


Remove the carton and protective packaging leaving the stove lying on the pallet. Carefully stand the Front up and remove the following contents from the pallet.

- High Chrome Cast Iron and Steel parts -
  - Transition grate (1)
  - Top baffle (2)
  - Firefence (3)
- Operating tool (4)
- 2 of M8 x 200mm threaded rods with fixing screws and clamping brackets ( 5,6, & 7)
- Bag containing
  - Anchor Bolt (8)
  - Door handle assembly consisting of
    - Timber handle (9)
    - 8mm countersunk screw (10)
    - Spring washer (11)

## Step 2:

Put your hand into the chimney through the door of the Insert and hold the right hand clamping bracket in the vertical position. With this held vertical adjust the front fixing screw on the front of the stove to tighten the clamping bracket onto the fireplace lintel thus pulling the stove against the fireplace. (If the threaded rods connecting the clamping brackets to the clamping screws are too long they can be shortened using a hacksaw. If they are too short, two longer lengths of M8 threaded rod may be obtained from a hardware shop.) Repeat this operation for the left hand clamping bracket. When both have been tightened the stove should be very firmly held against the fireplace. See Figs .6a and 6b.

Fig 6a

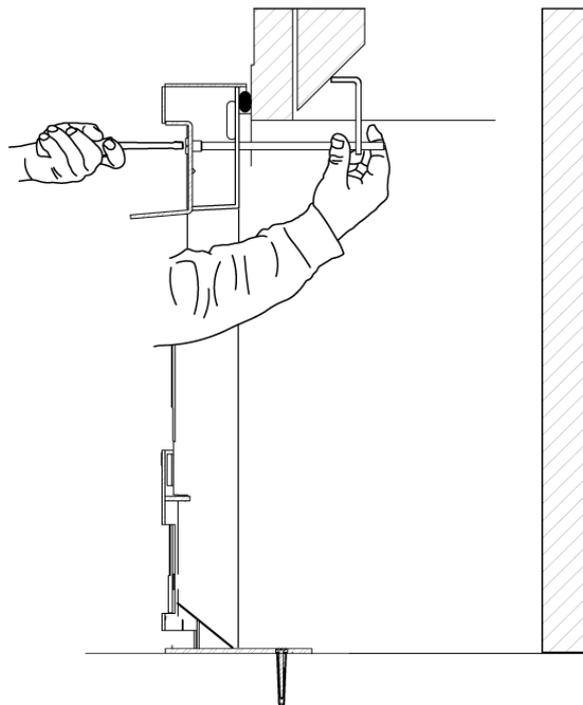

## Plan Ahead

Read these Instructions carefully before Installing your Stoker Stove. Failure to do so may result in personal injury and / or property damage.

All local regulations, including those referring to national and European standards need to be complied with when installing the QIS Stove.

A safe insert stove installation involves several elements, including –

- ventilation and combustion air
- the chimney
- the connection between the appliance and chimney
- protection of combustible materials in the vicinity of the stove
- full compliance with local Building Regulations

Each of these elements is equally important for a safe stove installation.

### **VENTILATION & COMBUSTION AIR REQUIREMENTS**

Over and above local Building Regulations, provision for outside combustion air may be necessary to ensure that fuel-burning appliances do not discharge products of combustion into the house.

Building Regulations Guidelines to determine the need for combustion air may not be adequate for every situation. Whether required by the local Building Regulations or not, it is advisable to provide permanent ventilation to outside air supply in any room where a stove is situated.

Outside combustion air is particularly required if --

- The solid-fuel-fired appliance does not draw steadily, smoke rollout occurs, fuels burn poorly, or back-draughts occur whether or not there is combustion present.
- Existing fuel-fired equipment in the house, such as fireplaces or other heating appliances, smell, do not operate properly, suffer smoke roll-out when opened, or back-draught whether or not there is combustion present.
- Opening a window slightly on a calm (windless) day alleviates any of the above symptoms.
- The house is equipped with a well-sealed vapour barrier and tight fitting windows and/or has any powered devices that exhaust house air.
- There is excessive condensation on windows in the winter.
- A ventilation system is installed in the house.

If these, or other indications, suggest that infiltration air is inadequate, additional combustion air should be provided from the outdoors. Outside combustion air can be provided to the stove using either an Indirect Method, or a Mechanical Ventilation System as described below –

- Indirect method--
  - for an appliance not certified for direct connection of outside combustion air, the outside air is vented into the room at a point no closer than 300mm from the appliance, to avoid affecting the performance of the stove.
- Mechanical ventilation system such as air change or heat recovery –
  - The ventilation system may be able to provide sufficient combustion make-up air for the solid-fuel-fired appliance.
  - The ventilation system might need to be re-balanced by a ventilation technician after installation of the appliance.

**IMPORTANT:** Whatever method is used to provide enough combustion air into the room for safe operation of the Stove, it is very important that all air vents in the room are positioned so that they are not liable to blockage during normal use.

## Chimney

The QIS Insert stove is designed for installation in standard Irish or British fireplace openings conforming to BS1251 & BS8303

Remember that it is the chimney that makes the stove work, not the stove that makes the chimney work. This is because a chimney actually creates suction, called draught, which pulls air through the stove.

Several factors affect draught, particularly –

- Height,
  - a minimum chimney height of 4.57 metres from the floor on which the stove is installed is required for the QIS
- Cross-sectional area,
  - The chimney for the QIS must have a cross-sectional area of at least 0.018m<sup>2</sup> (150mm diameter)
- Temperature of the chimney, as well as
- Proximity of surrounding trees or buildings.

## Masonry Chimneys

**Prior to installing the QIS, you should have your chimney cleaned and inspected, and, if necessary, repaired by a competent chimney sweep or relined, using an approved relining system.**

Please note that --

- No other appliance can be vented into the same flue.
- A chimney must be the required height above the roof or other obstruction for safety and for proper draught operation. The requirement is that the chimney must at least 76mm higher than the highest point where it passes through the roof and at least 50mm higher than the highest part of the roof or structure that is within 255mm of the chimney, measured horizontally

- Chimneys shorter than 4.57 metres may not provide adequate draught. This could result in smoke spilling into the room from the door or joints in the stove. In addition, inadequate draught can cause puffing.
- A too-strong draught causes excessive temperatures and can shorten burn times.
- Excessive draughts can be corrected by having your dealer install a barometric damper at 2.54mm of water column.
- If you suspect you have draught problems, consult your dealer.

## **Chimney Cleaning**

When inspecting a masonry chimney, start at the clean-out door, normally found in the basement, at the base of the chimney, or on the outside. If the chimney does not have a clean-out door it must be inspected and cleaned by removing the stove from chimney.

**IMPORTANT:** After a prolonged shutdown period it is essential to check the appliance and Chimney to make sure that there is no blockages that may impair the performance and function of the Stove.

## Protection of Combustibles

### Clearances to Combustibles

A combustible is anything that can burn, and in the case of stove installations, these combustibles may not be visible. If you are not sure of the combustible nature of any material in the vicinity of your planned stove installation, you should check with your local fire officials. Remember that "fire resistant" materials are considered combustible; they are difficult to ignite, but they will burn.

**CAUTION:** The QIS Insert stove becomes extremely hot in operation. Convection air from the grilles at the top and sides can reach 350°C. These grilles must always be kept clear. A fire-guard should be used if children, the elderly, or infirm are present. Flammable materials should not be stored near the appliance.

**CAUTION:** If you have recently purchased a home that has a stove hearth in it that you plan to use, it is extremely important that the entire system be examined for safety. Many older homes may have faulty chimneys, or previous owners may have covered combustible walls or studs with brick veneers. Heat is conducted readily through brick and could ignite unseen combustibles behind it.

Contact local building or fire official about restrictions and installation requirements in your area

### Floor Protection

The QIS Insert stove must be placed on a **non-combustible surface** at least 75mm thick that extends at least 200mm beyond the sides and 250mm beyond the front of the stove with no obstructions that might prevent the door being opened.

### Operation

Before building a fire in your new insert stove, please read the following section carefully.

The QIS insert stove is designed to burn solid fuels. Stove outputs obviously relate to the calorific value of the fuel being burned. When burning wood, higher efficiencies and lower emissions generally result when burning air-dried seasoned hardwoods, as compared to softwoods or to green or freshly cut hardwoods.

Your Mulberry QIS Stove is designed to be used with only the recommended fuels.

The amount of fuel recommended is 1 to 3 Kg of mineral fuel and 1kg of timber per refuelling.

**Do not over-fire your QIS Stove. Over-firing will damage a painted or enamel finish..**

The approximate calorific values of various fuels are -

Anthracite	8.2 kW/Kg
House coal	7.2 kW/Kg
Wood (dry)	5.0 kW/Kg
Peat Briquettes	4.8 kW/Kg
Bog peat	3.4 kW/Kg

**Do not burn:**

- Household rubbish
- Cardboard
- Treated or painted Wood Solvents
- Treated or painted Wood
- Chemical Chimney Cleaners
- Coloured Paper

- Any synthetic fuel or logs that have not been approved for wood stoves.

Burning treated wood, rubbish, solvents, coloured paper, chemical chimney cleaners, or trash may result in release of toxic fumes and may cause the stove to overheat.

Never use gasoline, gasoline-type lantern fuel, kerosene, charcoal lighter fluid, or similar liquids to start or "freshen up" a fire in this stove. Keep all such liquids far away from the heater while it is in use.

If ever a chimney fire is suspected, immediately close the draught regulator and make sure the stove door is closed. Call the fire service and get everyone safely out of the house. Trying to extinguish the fire in the stove will not help. In fact it can make the matter worse by allowing oxygen through the door, which then supports the fire in the chimney. When the roaring and crackling has stopped, resist the temptation to open the door and look at the fire. The fire may have suffocated, but could rekindle when the door is opened. After a chimney fire, do not use the stove until the chimney and the flue pipe have been cleaned and inspected to ensure that no damage has been sustained.

### **Breaking-in your new stove**

A cast iron stove should be "broken in" gradually. Five consecutive small fires should be built in the stove prior to operating the stove continuously. Each fire should be a little larger than the previous one, and the last fire should be a full-sized load. Allow the stove to cool completely between fires.

It is normal for new painted stoves to emit a smell or even some smoke during the first few fires. The seasoning of the high temperature paint causes this, and the odour will diminish with each fire and eventually disappear. Opening a window or door near the stove will help provide additional ventilation and reduce the odour.

### **Seasonal use.**

Operation of the QIS controls can vary during different times of the year. Causes of this can be high winds and / or adverse weather conditions. During high winds the characteristics of your chimney flue can vary significantly from that when your Stove was installed. Severe up and down draughts may be experienced.

Please be aware that in the case of a severe up-draught you will need to shut down the air control settings more than usual to maintain the level of fuel burning that you are accustomed to.

Please be aware that in the case of severe down-draughts, the wind may wind to blow directly down your chimney. In this case a suitable anti down-draught terminal or cowl may have to be fitted.

Unfortunately, neither of the above can be ascertained when installing and commissioning the Stove if the conditions are not present on Installation.

## Controls

### Primary Air control

The primary combustion air for the stove is controlled by a “spin valve” located at the bottom of the stove door. See Fig. 11. Turning this valve to the left, (anti clockwise), increases the air supply and thus the burn rate. Turning the spin valve to the right, (clockwise), closes off the air supply and reduces the burn rate. Adjusting this spin valve will give desired level of heat from the stove by controlling the amount of air entering the firebox. This should be fully opened when lighting the stove and adjusted to the required position when the stove is burning normally.

### Secondary Air control

The secondary air supply to the stove is controlled by a “slide” located above the door. See Fig. 10. Secondary air initially is relatively cold and passes down the door glass keeping it clean. This air is then directed into the fire increasing combustion and creating turbulence that causes secondary burning of particulates thus reducing emissions from the stove up the chimney. Moving the slide to the left increases the supply of secondary air while moving it to the right reduces the supply.

### Overnight burning

The use of the above primary and secondary air controls are a critical part of keeping a fire in overnight if that is desired. Firstly, there must be enough fuel in the firebox to sustain an all-night burn. Then, the amount of air entering the firebox must be kept at an absolute minimum. The spin valve should be closed fully and the secondary air slide should be moved to a setting where the fire is barely glowing. Trial and error will determine the setting for your own particular chimney draught.

**WARNING: It is essential that the chimney is clean and in good condition before overnight burning is attempted as a shutting down of the air supply on the stove is requiring the chimney to fully dispel the products of combustion such as carbon monoxide.**

## Starting a good fire

- Make sure the spin valve air draught control and secondary air slide are fully open to promote maximum burn. Open the door and cover the grate with tightly crushed newspaper. Criss-cross a generous amount of firelighters or dry kindling, such as split pieces of scrap timber, on top of the paper. Place a small amount of fuel such as 1 or 2 dry split logs, or 3 or 4 peat briquettes, or a few pieces of coal or turf, on top of the firelighters or kindling.
- Light the paper evenly across the front and close the door.
- When the initial pieces of fuel are burning healthily, continue to add fuel until a healthy bed of glowing embers has formed to the desired size.

- Allow this to burn for several minutes. Once the stove is burning well, adjust the air control to the desired heat output level. Avoid operating the stove with the air control closed completely.
- In order for secondary combustion to occur, the fire must be well established with temperatures above 600°C in the firebox.
- If the fire dies out, this cause is most likely either an insufficient bed of fully burning fuel, reducing the air supply too soon, or using damp logs as fuel.

## **Benefits of a Good Fire**

A good fire will efficiently utilize your fuel, keep emissions and chimney build-up to an absolute minimum, require less work, and be predictable.

## **Reloading**

Reload the stove while it is still hot and there is adequate heat to ignite the fresh fuel load. It is a good idea to include a smaller piece or two of fuel at the base of the new load to help the stove recover more quickly to its operating temperature.

## **Reloading Procedure**

- Always wear gloves when tending the stove.
- Move the air control spin valve and secondary air slide to the fully open position.
- Wait a few seconds and open the door.
- Use a stove shovel or similar tool to break up any remaining embers and to move some live embers toward the front where combustion air enters.
- Load the fuel (Smaller pieces first).
- Close the door.
- Wait 5-10 minutes and adjust the air control to desired setting.

## **Ash Removal**

- When ash builds up on the grate use a poker to disturb the fuel bed and clear a path for air.

- If ash is allowed to build up underneath the grate to the point where the ash is touching the underside of the grate, the flow of cool air underneath the grate will be reduced and the life of the grate shortened.
- When removing ash from a stove that is in operation it is always a good idea to wear heavy protective gloves while removing and disposing of the ashes.
- Ashes should be placed in a metal container used exclusively for ashes, with a tight fitting lid. The closed container of ashes should be placed outdoors, well away from all combustible materials, pending final disposal. If ashes are disposed of by burying in soil or otherwise dispersed, they should be retained in the closed container until all cinders have thoroughly cooled.
- Overfiring will result if the stove is operated with the door open. This could cause damage to the stove, void the warranty and/or lead to a house fire.

**WARNING:** Operate the Mulberry QISstove only with the door fully closed. Keep the door fully closed except when loading fuel or removing ashes. A partially open door may result in over firing.

## Maintenance

At least once a year, perform a routine maintenance check. A good time to do this is when the chimney and the flue pipe are being cleaned. The chimney and flue pipe should be cleaned whenever accumulations of soot and creosote reach 6mm thick, which may be several times a year, depending on how the stove is operated. Thoroughly clean the stove. Brush all ash and soot out of the stove. It is better to brush out the ash and soot than to vacuum it out because soot particles are small enough to pass through most vacuum bags. In a dark room, use a strong light to inspect the stove inside and out for cracks or leaks at corners and joints. Cracked parts should be replaced. Leaks at joints can be patched with stove furnace cement. Check the door gasket for tightness. (See Fig 11. ). To do this, put a strip of printer or copier paper halfway into the stove, close and latch the door, and try pulling the paper out. If it can be removed easily the seal is too loose. Check several spots around the door. To replace the gasket, scrape out all old gasket material and gasket cement. Spread a 3mm bead of stove cement into the bottom of the groove and press in new gasket. Fire cement and gasket material may be obtained from your local Mulberry dealer.

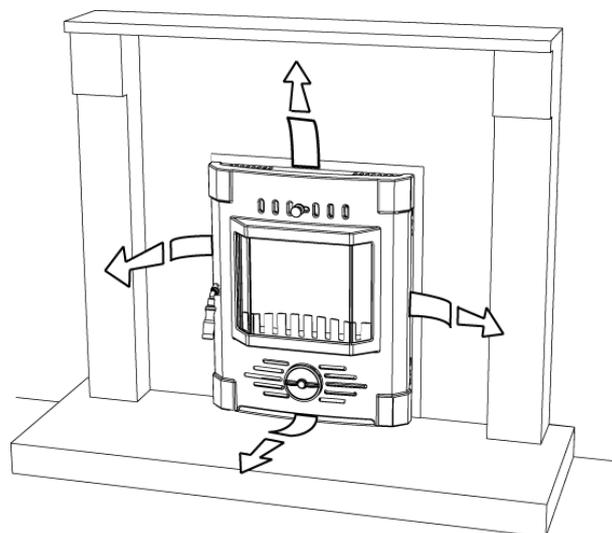


Fig 11.

## ***Replacement Parts***

Replacement parts for the Mulberry QIS can be ordered through your local authorised dealer. Use only genuine QIS parts for all maintenance and repairs.

**UNDER NO CIRCUMSTANCES SHOULD ANY MODIFICATIONS BE MADE TO THE STOVE WHICH CHANGES THE STOVE IN ANY WAY, AESTHETICALLY OR FUNCTIONALLY FROM THE MANUFACTURER'S ORIGINAL SPECIFICATION.**

**MODIFICATIONS TO THE STOVE WILL VOID THE WARRANTY AND MAY RESULT IN SERIOUS INJURY AND / OR PROPERTY DAMAGE.**

Should you have any queries concerning the installation or operation of your QIS stove, please first check our website, [www.mulberrystoves.com](http://www.mulberrystoves.com), where the FAQ (frequently asked questions) section may answer your query. If you need to contact us, our 'phone, fax and email details are :-

Telephone:                    051 897415      (from outside Ireland + 353 51 897415)

Fax                                051 897451      (from outside Ireland + 353 51 897451)

email                            [info@mulberrystoves.com](mailto:info@mulberrystoves.com)